

## FEATURES

- Stainless steel
- M10x1 thread
- Flush Diaphragm
- For Static and Dynamic Applications
- High Level Tension Output Available
- Low Installation Torque Sensitivity

## APPLICATIONS

- Hydraulic regulation process
- Explosion test benches
- Brake Systems
- Laboratory and research

## XPM10

### M10x1 Low Mass Miniature pressure sensor

#### SPECIFICATIONS

- Ranges 1 to 350 bar [15 psi to 5,000 psi]
- Absolute, sealed and gauge ranges
- Amplified output available
- Linearity up to  $\pm 0.25\%$  F.S
- Very low mass, approximately 20 grams without cable (dependent on options)

The XPM10 is a miniature transducer designed to measure static and dynamic pressure under a wide variety of conditions, including hostile environments. It is made of stainless steel or titanium and is available in standard ranges from 0-1 to 350 bars [15 up to 5000 psi].

The XPM10 incorporates a specific feature, which minimizes zero shifts caused by installation torque.

A PT1000 temperature probe is optionally available as a custom design.

The XPM10 may integrate different electronics for amplified outputs: A1 0.5-4.5V, A2  $\pm 5V$ , A3 4-20mA.

On request, instruction documents can be provided to ease the selection and use of our sensors and provide helpful tips.

**XPM10**

Miniature pressure sensor

**STANDARD RANGES**

Full Scale (FS)		Pressure Reference			Resonant Frequency	Sensitivity "FSO"	Overpressure	Burst Pressure
bar	psi	Gauge	Absolute	Sealed		(non amplified)	(rated pressure)	(rated pressure)
1	15	•	•	•	32 kHz	50 mV	2 x FS	5 x FS
2	30	•	•	•	32 kHz	100 mV	2 x FS	5 x FS
5	75	•	•	•	35 kHz	100 mV	2 x FS	5 x FS
10	150	•	•	•	50 kHz	100 mV	2 x FS	5 x FS
20	300	•	•	•	69 kHz	100 mV	2 x FS	5 x FS
35	500	•	•	•	79 kHz	100 mV	2 x FS	5 x FS
50	750	•	•	•	109 kHz	100 mV	2 x FS	5 x FS
100	1.5K			•	154 kHz	100 mV	2 x FS	5 x FS
200	3K			•	218 kHz	100 mV	2 x FS	5 x FS
350	5K			•	288 kHz	100 mV	2 x FS	3 x FS

- Notes:**
1. The suggested frequency of use is 20% of the resonant frequency
  2. The bandwidth for versions with A1, A2 and A3 electronics is 3kHz.
  3. Sensor characterized with a 10 VDC supply voltage as standard
  - 4: The sensitivity "FSO" has a tolerance of -30% to +50%.

**PERFORMANCE SPECIFICATIONS** (all values are typical at ambient temperature 23°C)

Parameters	Non amplified	Amplified A1	Amplified A2	Amplified A3	Notes
Power supply	10 Vdc regulated	10 to 30 Vdc	±12 to ±18 Vdc	10 to 26 Vdc	A3 version uses a 2 wires circuit
Sensitivity "FSO"	Previous table	4 V ±0.2 V	5 V ±0.25 V	16 ±0.4 mA	
Zero Offset	<±10 mV	0.5 V ±0.2 V	0 V ±0.25 V	4 ±0.4 mA	
Non Linearity	±0.5%FS ±0.25%FS				FS ≤ 2 bar or 30 psi FS ≥ 5 bar or 75 psi
Hysteresis	±0.25%FS				
Repeatability	±0.2%FS				
Operating Temperature (OTR)	-40 to 150°C (-40 to 302°F)	-40 to 120°C (-40 to 250°F)		-20°C to 80°C (-4°F to 176°F)	
Compensated Temperature (CTR)	0 to 60°C (32 to 140°F)				
Thermal Zero Shift in CTR	±3%FS/50°C ±2%FS/50°C				FS = 1 bar or 15 psi FS ≥ 2 bar or 30 psi
Thermal Sensitivity Shift in CTR	±2% of reading /50°C				
Input Impedance or consumption	500 Ω to 1500 Ω	< 30 mA			
Output Impedance	500 Ω to 800 Ω	1000 Ω			
Ingress Protection	IP50 IP67 (consult factory for IP68)				Standard or SC P7 or P7-SC
Media – Pressure Port	Fluids compatible with Stainless steel				


Insulation under 50Vdc ≥100MΩ

CE certification according to EN 61010-1, EN 50081-1, EN 50082-1.

# XPM10

Miniature pressure sensor

## DIMENSIONS (metric & [imperial])

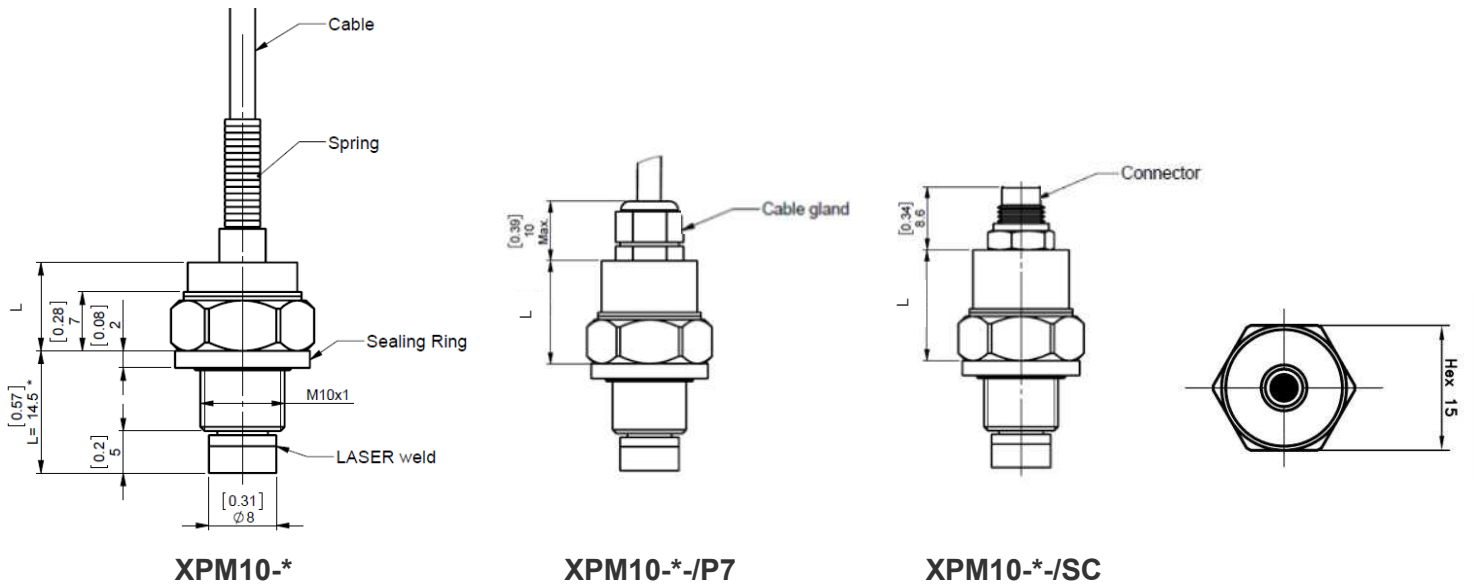

Version:	Non-Amplified			Amplified A1/A2			Amplified A3		
Option:	standard	P7	SC	standard	P7	SC	standard	P7	SC
L (mm)	7	11.5	11.5	10.5	14	15	23.5	23.5	28

Weight: The standard configuration without cable and sealing ring is < 20g

## WIRING SCHEMATICS

Functions (non-amplified)	Wire / Pin
+SUPPLY	Red / 1
+OUTPUT	Green / 4
-OUTPUT	White / 2
-SUPPLY	Black / 3
Shield	Body

0-5V Functions (A2)	Wire / Pin
+SUPPLY	Red / 1
+OUTPUT	Green / 4
-0V / COM	White / 2
-SUPPLY	Black / 3
Shield	Body

0.5-4.5V Functions (A1)	Wire / Pin
+SUPPLY	Red / 1
+OUTPUT	Green / 4
-OUTPUT	White / 2 (common with - supply)
-SUPPLY	Black / 3 (common with - output)
Shield	Body

4-20mA Functions (A3)	Wire / Pin
+SUPPLY / +OUTPUT	Red / 1
-SUPPLY / -OUTPUT	Black / 3
Shield	Body

## ADDITIONAL INFORMATION

- Recommended Tightening Torque: 4 to 10 Nm (44 to 88 lbf.in) for FS ≤ 5 bar or 75 psi  
10 to 15 Nm (88 to 132 lbf.in) for FS ≥ 5 bar or 75 psi
- Sealing: One FKM sealing ring Ø 16x2 is supplied with sensor. (Operating static temperature -30°C to 200°C)
- Electrical connection: Standard = 2m of shielded cable ø3mm with 4 wires AWG30, Silicon jacket  
SC option = Integral connector ref. OMNETICS CMR-02D-04P supplied with mating plug CMR-02-B-04S wired with 2m of cable (FMC-COM-4B-L2M)

## XPM10

Miniature pressure sensor

### OPTIONS

<b>Temp. Compensation</b> <i>(other compensation range are available on request)</i>	<b>Z04:</b> CTR -40 to 90 °C [-40 to 194 °F] (not available with A3 and P7 options)
	<b>Z35:</b> CTR 20 to 120 °C [68 to 248 °F] (not available with A3 options)
	<b>Z36:</b> CTR 20 to 150 °C [68 to 302 °F] (not available with A1, A2 and A3 options)
<b>Waterproofing</b>	<b>P7:</b> IP67 protection for cable gland output or SC option (available only for Absolute and Sealed Gauge versions)
<b>Removable cable</b>	<b>SC:</b> Connector output with prewired mating connector, cable length 2 m [6.6 ft]
<b>Cable Length</b>	<b>L00M:</b> special cable length = L5M / L10M / L15M / L20M, total length in meters (standard length 2,0 m [6,6 ft])

Note: ETxx options are now replaced by Zxx options.

### ORDERING INFORMATION

<b>XPM10</b>	-	<b>A1</b>	-	<b>20B</b>	<b>G</b>	-	<b>/Z35/P7/L5M</b>
Model	-	Output signal	-	Pressure Range	Pressure reference	-	Options
<b>XPM10</b>		(blank): non-amplified <b>A1:</b> 0,5 to 4,5V <b>A2:</b> 0 to 5V <b>A3:</b> 4 to 20 mA		<b>1B</b> <b>2B</b> <b>5B</b> <b>10B</b> <b>20B</b> <b>35B</b> <b>50B</b> <b>100B</b> <b>200B</b> <b>350B</b>	<b>A:</b> Absolute <b>G:</b> Gauge <b>S:</b> Sealed		<b>/Z04</b> <b>/Z35</b> <b>/Z36</b> <b>/P7</b> <b>/SC</b> <b>/L00M</b>

The sensor ordering codes uses only bar as units because **XPM10** uses metric threads. Psi value correspondence is noted as information.

广州工控传感科技有限公司

电话: 400-822-6658

邮箱: [gzgk@foxmail.com](mailto:gzgk@foxmail.com)

网址: [www.gkmems.com](http://www.gkmems.com)

地址: 广州市天河区珠江西路15号16层