



## AXISENSE-2 SERIES VOLTAGE TILT SENSOR

### SPECIFICATIONS

- Dual axis inclinometer
- Measurement ranges  $\pm 25^\circ$ ,  $\pm 45^\circ$  and  $\pm 90^\circ$
- Voltage output
- Horizontal mounting

### FEATURES

- 8 to 30 VDC supply voltage
- Digital signal processing includes
  - filter (e.g. vibration damping)
  - temperature compensation
- 12-bit resolution
- 100 Hz refresh rate
- $-40^\circ\text{C}$  to  $85^\circ\text{C}$  temperature range
- Accuracy typically
  - $0.5^\circ$  |  $-40^\circ\text{C}$  to  $85^\circ\text{C}$
  - $0.15^\circ$  |  $25^\circ\text{C}$

### APPLICATIONS

- Mobile and stationary cranes
- Lift platforms
- Building control
- Weighing systems
- Truck chassis levelling
- Vehicle applications
- Road construction machines

The **AXISENSE-2 Series inclinometer** is mainly developed with focus on platform leveling, dynamic engine management, tip-over protection and tilt alarm.


A fast response time and good accuracy makes this device the ideal choice for mobile leveling applications. It features digital signal processing including temperature compensation.

The integrated filter improves performance and allows using the sensor in many noisy environments (e.g. vibrations).

The inclinometer includes a powerful digital signal processing that offers various filter algorithms and allows customer specific OEM solutions. It is possible to adjust the sensor to different environments yielding an optimized performance. Customization can also be made in terms of angular range and connectivity, i.e. cable and connector.

The PA6.6 housing is very compact in size and has compression limiter bushings for safe installation of the sensor. It is compatible with oil, grease and fuel also. Therefore it is frequently used for engine and vehicle applications.

Dimensions [mm]

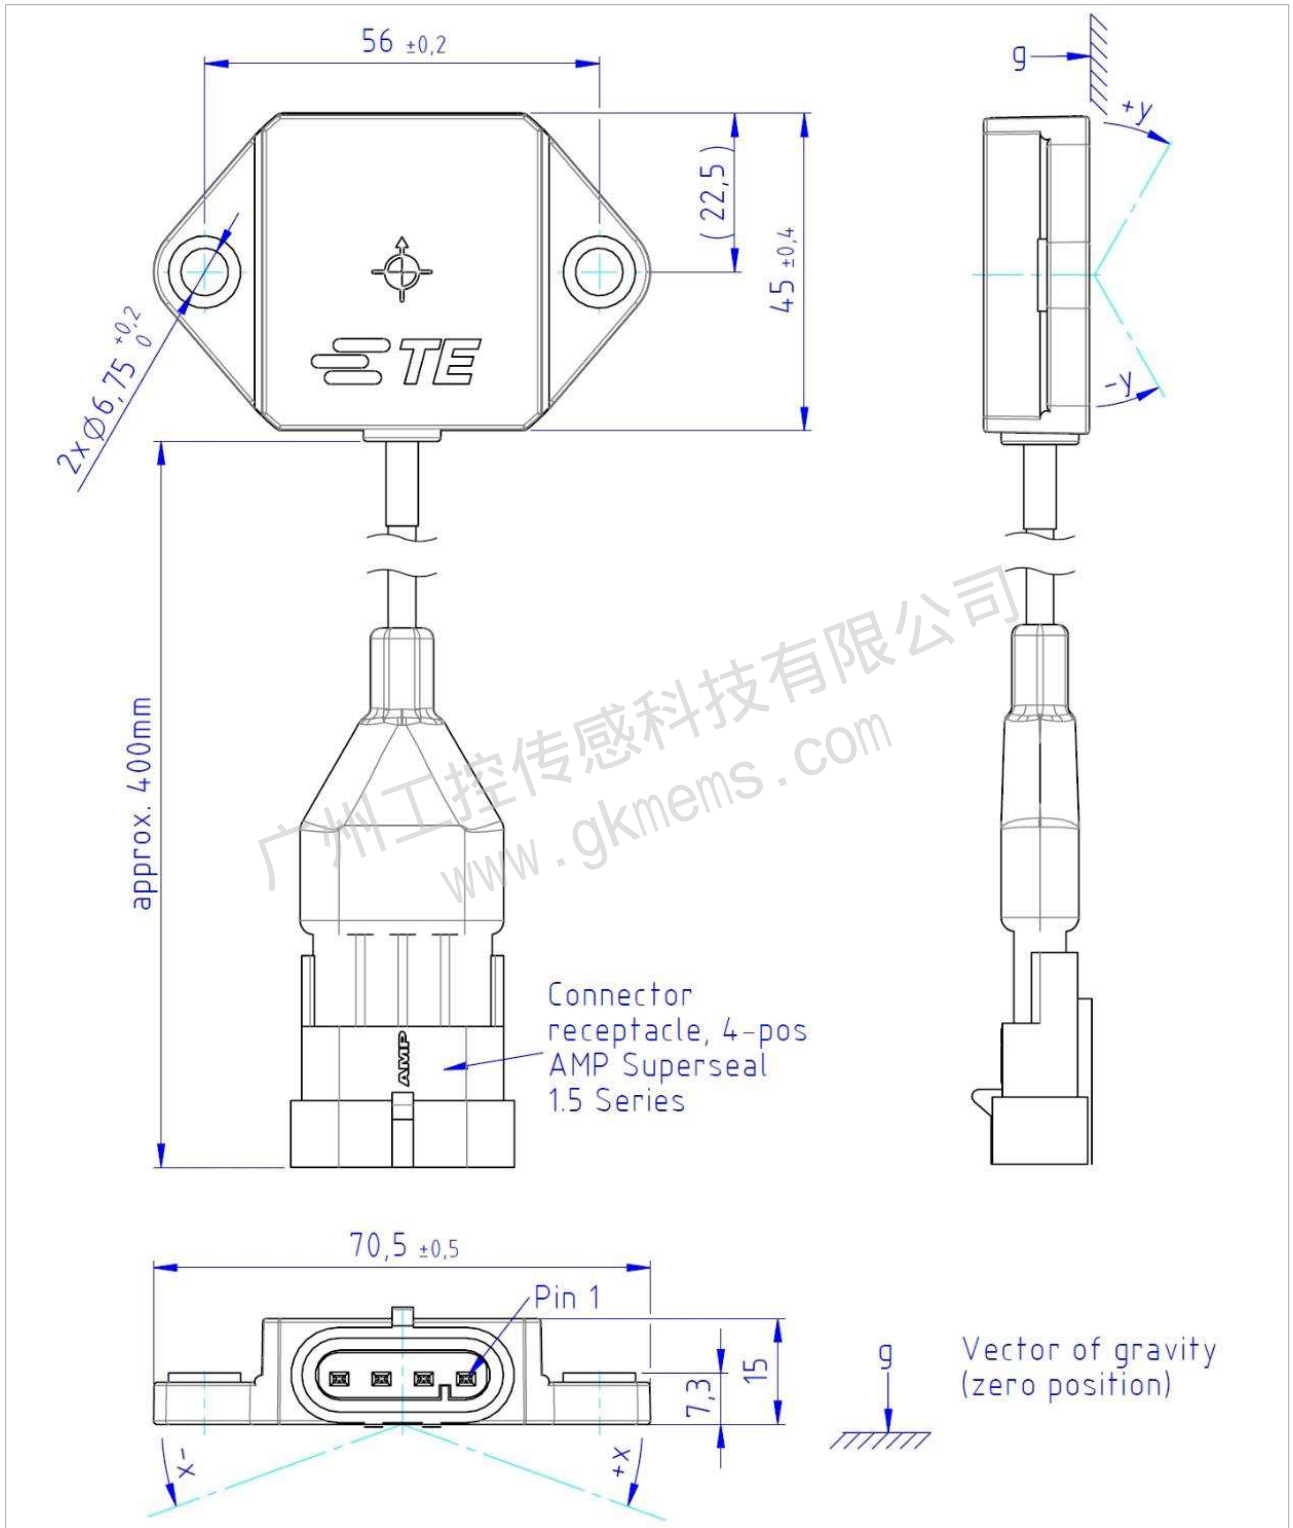

## AXISENSE-2 SERIES VOLTAGE TILT SENSOR


### PARAMETERS

Parameter	Value	Comment
Range	$\pm 25^\circ$ , $\pm 45^\circ$ or $\pm 90^\circ$	Dual axis sensor
Accuracy, typ.	0.5°	T= -40 °C to 85 °C
Accuracy, typ.	0.15°	T= 25 °C
Resolution	12 bit	
Refresh rate	100 Hz	Internal processing
Startup time	<1 s	Valid output signal
Supply/excitation voltage	8 to 30 V	Direct current (DC) stabilized
Supply current, typ.	15 mA	No load
Output	0.5 to 4.5 V	-25° to 25°, -45° to 45° or -90° to 90°
Connector	AMP Superseal 1.5-Series, 4-pos. cap housing, TE Connectivity part-no. 282106-1	Requires 4-pos. plug housing, AMP Superseal 1.5-Series at connecting harness, TE Connectivity part-no. 282088-1
Cable	4 wire 0.25 mm <sup>2</sup> , outer diameter Ø3.9 mm	PUR, length incl. connector 400 mm, full temperature range, flexible
Ingress Protection Class	IP67	applies if proper mating connector is attached to form sealing
Operation temperature range	-40 °C to 85 °C	
Storage temperature range	-40 °C to 85 °C	
Weight, typ.	60 g	
Dimensions	70.5 mm x 45 mm x 15 mm	W x D x H


Applicable **Mounting Recommendations for Sensor Modules of AXISENSE-Series** can be downloaded from te.com Resources section as Document Number 114-160013.

### CONNECTOR PINNING

Pin	Function	Description
1	V <sub>CC</sub>	8 to 30 VDC supply input (+)
2	GND	GND
3	Output X	0.5 to 4.5 V, X axis output
4	Output Y	0.5 to 4.5 V, Y axis output

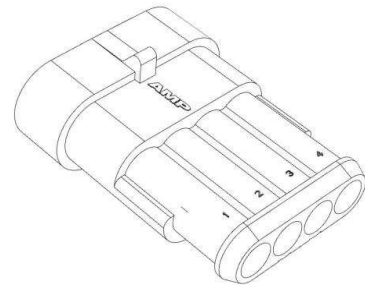


**TRANSFER CHARACTERISTIC**

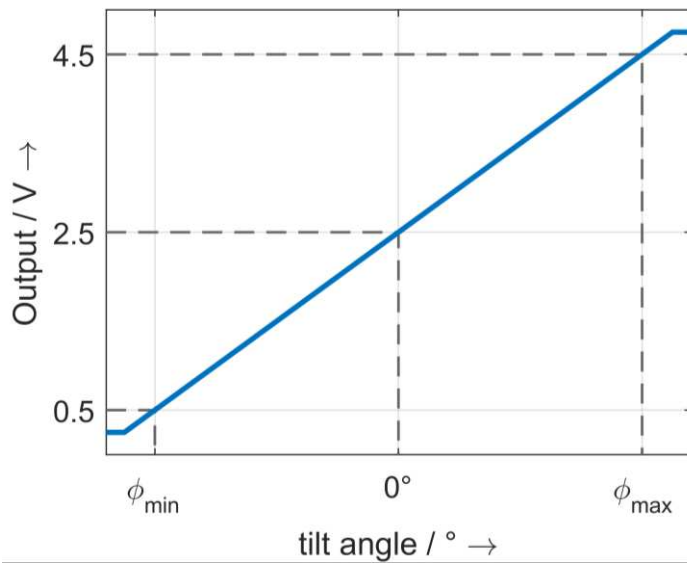

Part-No.	$\phi_{min}$	$\phi_{max}$
AXISENSE-2 V-OUT-25	-25°	25°
AXISENSE-2 V-OUT-45	-45°	45°
AXISENSE-2 V-OUT-90	-90°	90°

Linear transfer characteristic between  $\phi_{min}$  and  $\phi_{max}$

**FUNCTION VIEW**

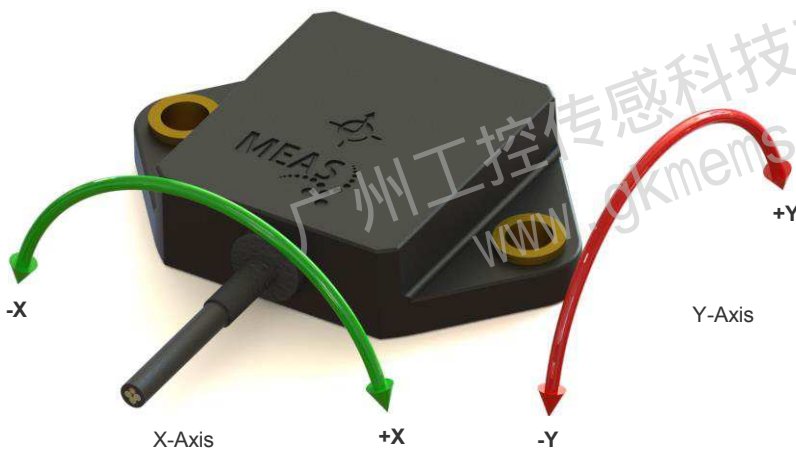

This AXISENSE-2 series voltage inclinometer is designed for floor mount application.

### ORDERING INFORMATION

#### PART NUMBER

AXISENSE-2 V-OUT-25 FLOOR MT  
(TCPN: G-NSDOG2-001)

AXISENSE-2 V-OUT-45 FLOOR MT  
(TCPN: G-NSDOG2-002)

AXISENSE-2 V-OUT-90 FLOOR MT  
(TCPN: G-NSDOG2-003)

#### SHORT DESCRIPTION

Dual axis inclinometer, floor mount, **angular range  $\pm 25^\circ$** , supply 8 to 30 VDC, output voltage 0.5 to 4.5 V

Dual axis inclinometer, floor mount, **angular range  $\pm 45^\circ$** , supply 8 to 30 VDC, output voltage 0.5 to 4.5 V

Dual axis inclinometer, floor mount, **angular range  $\pm 90^\circ$** , supply 8 to 30 VDC, output voltage 0.5 to 4.5 V

For other orientations, measurement ranges or supply voltages please contact TE Connectivity sales representatives.

广州工控传感科技有限公司

电话: 400-822-6658

邮箱: [gzgk@foxmail.com](mailto:gzgk@foxmail.com)

网址: [www.gkmems.com](http://www.gkmems.com)

地址: 广州市天河区珠江西路15号16层